



ROADWAY LIGHTING QUICK SELECTOR

The graphs below are summaries of point-by-point computer arrays for various pole spacings. Select the maximum spacing for the average to minimum uniformity desired (dashed line); scale on the right. Then select the wattage rating that provides the maintained footcandles desired. Footcandle and uniformity recommendations are shown on page 7 9030.


TWO-LANE ROADWAY

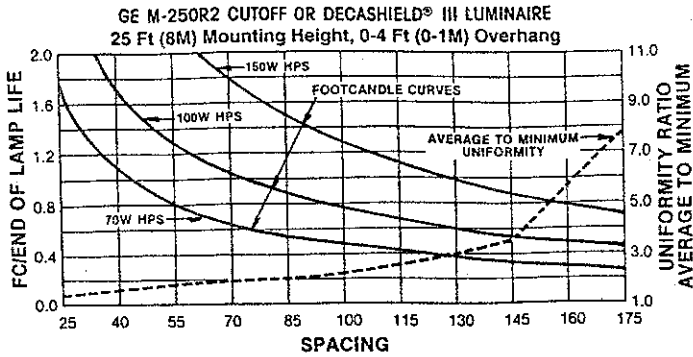


TWO-LANE ROADWAY

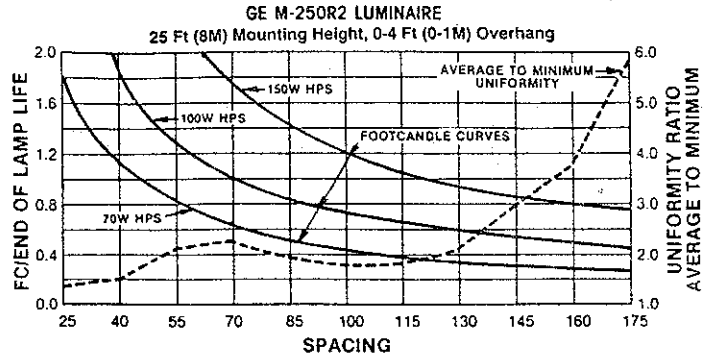


THREE-LANE ROADWAY

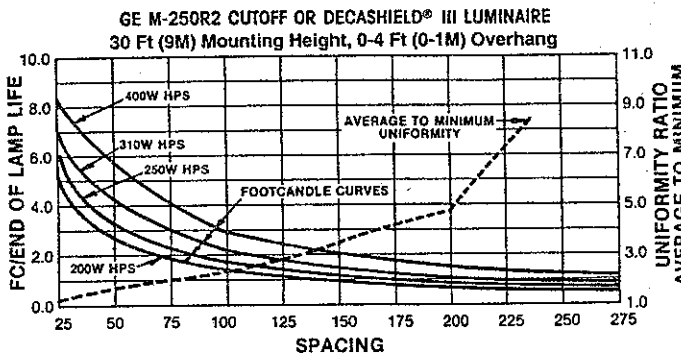

THREE-LANE ROADWAY

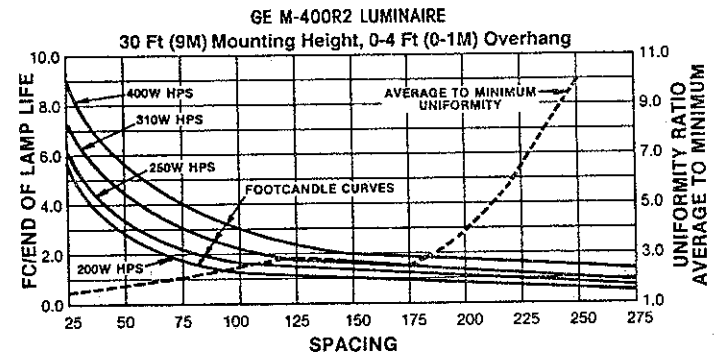

FOUR-LANE ROADWAY

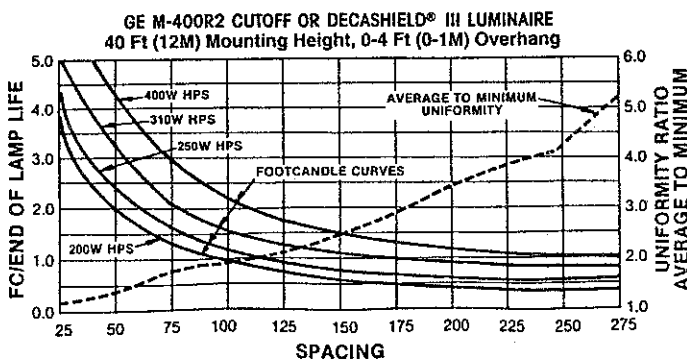

FOUR-LANE ROADWAY

