



ROADWAY LIGHTING QUICK SELECTOR

The graphs below are summaries of point-by-point computer arrays for various pole spacings. Select the maximum spacing for the average to minimum uniformity desired (dashed line); scale on the right. Then select the wattage rating that provides the maintained footcandles desired. Footcandle and uniformity recommendations are shown on page 380. See page 328 for an explanation of the descriptions for roadway light distribution patterns: for example MCII = Medium, Cutoff, Type II.


TWO-LANE ROADWAY

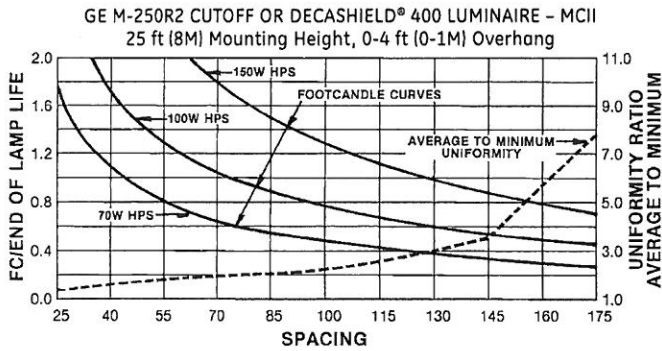


TWO-LANE ROADWAY

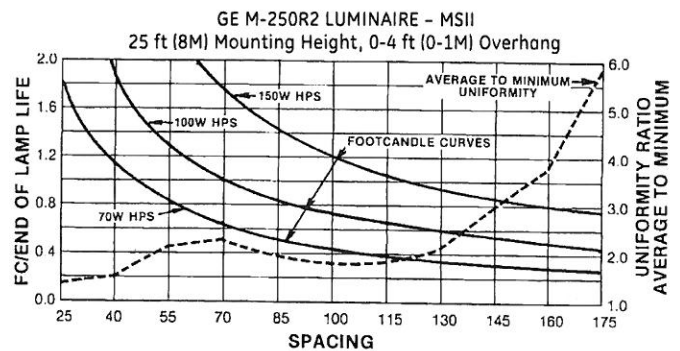


THREE-LANE ROADWAY

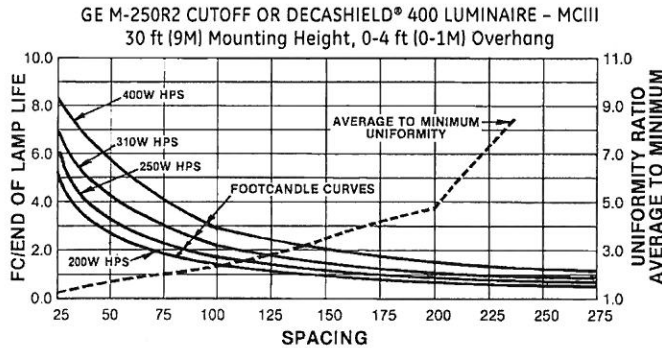


THREE-LANE ROADWAY

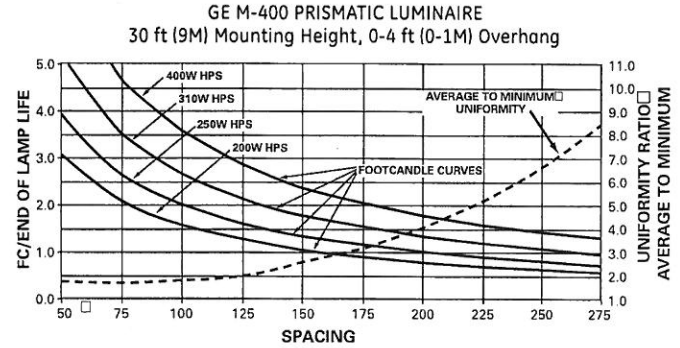

FOUR-LANE ROADWAY

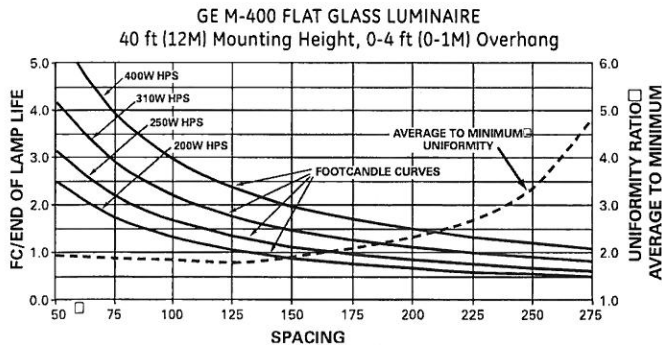

FOUR-LANE ROADWAY

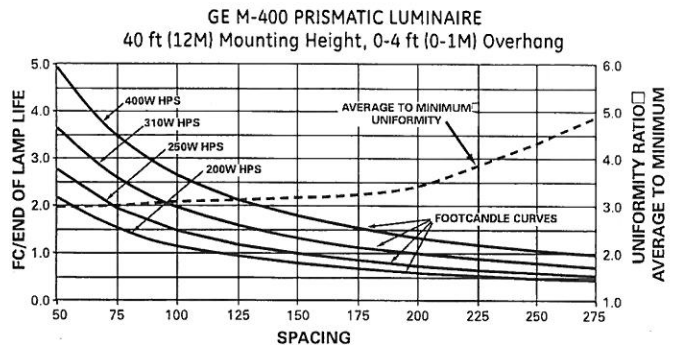

NOTE: To convert footcandles to lux, multiply footcandles by 10.76

